



Industrial  
Secure Digital  
Memory Card  
THEMIS-A Series

**Product Specification**

INDUSTRIAL

Secure Digital Memory Card

Version 01V0

Document No. 100-xPSDC-EATS

October 2015

**APRO CO., LTD.**

Phone: +88628226-1539

Fax: +88628226-1389

This document is for information use only and is **subject to change without prior notice**. APRO Co., Ltd. assumes no responsibility for any errors that may appear in this document, nor for incidental or consequential damages resulting from the furnishing, performance or use of this material. No part of this document may be reproduced, transmitted, transcribed, stored in a retrievable manner or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written consent of an officer of APRO Co., Ltd.

All parts of the APRO documentation are protected by copyright law and all rights are reserved.

APRO and the APRO logo are registered trademarks of APRO Co., Ltd.

Product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies.

© 2014 APRO Corporation. All rights reserved.

#### Revision History

<b>Revision</b>	<b>Description</b>	<b>Date</b>
1.0	Initial release	2015/10/14

# CONTENTS

<b>1. INTRODUCTION.....</b>	<b>- 2 -</b>
1.1. SCOPE.....	- 2 -
1.2. SYSTEM FEATURES.....	- 2 -
1.3. FLASH MANAGEMENT TECHNOLOGY - GLOBAL WEAR LEVELING.....	- 2 -
<b>2. PRODUCT SPECIFICATIONS.....</b>	<b>- 3 -</b>
2.1. SYSTEM ENVIRONMENTAL SPECIFICATIONS.....	- 3 -
2.2. SYSTEM POWER REQUIREMENTS.....	- 3 -
2.3. SYSTEM PERFORMANCE.....	- 3 -
2.4. SYSTEM RELIABILITY.....	- 4 -
2.5. PHYSICAL SPECIFICATIONS.....	- 4 -
<b>3. INTERFACE DESCRIPTION.....</b>	<b>- 6 -</b>
3.1. APRO SECURE DIGITAL MEMORY CARD INTERFACE.....	- 6 -
3.2. PIN ASSIGNMENTS.....	- 6 -
<b>APPENDIX A: ORDERING INFORMATION.....</b>	<b>- 7 -</b>
1. PART NUMBER LIST.....	- 7 -
2. PART NUMBER DECODER:.....	- 7 -
<b>APPENDIX B: LIMITED WARRANTY.....</b>	<b>8</b>

## **1. Introduction**

APRO Industrial Secure Digital Memory Card – THEMIS-A Series, is specifically designed to meet the security, performance and environmental requirements of some significant applications such like networking, telecommunications and data-communications, mobile & embedded computing, medical instruments and industrial computing applications. Available capacities from 128MB up to 32GB with SLC-NAND Toshiba flash IC. APRO Industrial Grade SD & SDHC Memory Cards includes a copyright protection that complies with the security of the SDMI standard, and the physical form-factor, pin assignment and data transfer protocol are forward compatible with SD Card, with some additions.

### **1.1. Scope**

This document describes the key features and specifications of APRO Industrial Grade Secure Digital Memory Cards.

### **1.2. System Features**

- SLC-NAND Flash technology
- Capacities available from 128MB up to 32GB
- Fully compatible to SDA Specifications v1.01 / v1.1 / v2.0
- Supported SD command Class 2,4,6,7,8,10
- 9 pins gold fingers
- Supports industrial grade operating temperature -40°C to +85°C
- Supports SD mode and SPI mode
- Supports CPRM
- Copyright Protection Mechanism-Complies with highest security of SDMI standard
- Write protect feature using mechanical switch
- Power protection mechanism by advanced technology
- SD performance up to 22.8 MB/sec; SDHC performance up to 18.7 MB/sec
- RoHS & REACH compliant

### **1.3. Flash Management Technology - Global Wear Leveling**

In order to gain the best management for flash memory, APRO THEMIS-A Series SD Card supports Global Wear-leveling technology to manage the Flash system. The life of flash memory is limited; the management is to increase the life of the flash product.

Wear-leveling algorithm evenly distributes data over an entire Flash cell array and searches for the least used physical blocks. The identified low cycled sectors are used to write the data to those locations. If blocks are empty, the write occurs normally. If blocks contain data, it moves that data to a more heavily used location before it moves the newly written data. Wear leveling maximizes effective endurance Flash array compared to no wear leveling products.

## 2. Product Specifications

For all the following specifications, values are defined at ambient temperature and nominal supply voltage unless otherwise stated.

### 2.1. System Environmental Specifications

Table 1: Environmental Specification

APRO Secure Digital Memory Card THEMIS-A Series		Industrial Grade WPSDHxxxG-EAITI
Temperature	Operating: Non-operating:	-40°C ~ +85°C -50°C ~ +95°C
Humidity	Operating & Non-operating:	10% ~ 95% non-condensing
Vibration	Operating & Non-operating:	7 Hz to 2K Hz, 5G, 3 axes
Shock	Operating & Non-operating:	10ms, 50G, 3 axes

### 2.2. System Power Requirements

Table 2: Power Requirement

APRO Secure Digital Memory Card THEMIS-A Series		Industrial Grade WPSDHxxxG -EAITI
DC Input Voltage (VCC) 100mV max. ripple(p-p)		3.3V ± 10%
+3.3V Current (Maximum average value)	Reading Mode :	43 mA (max.)
	Writing Mode :	69 mA (max.)
	Idle Mode :	180 uA (max.)

### 2.3. System Performance

Table 3: System Performances

Data Transfer Mode supporting		SDA Specification Ver 2.0				
Average Access Time		1 ms (estimated)				
SD	Capacity	128MB	256MB	512MB	1GB	2GB
	Maximum Performance	Sequential Read (MB/s)	18.1	21.6	22.0	22.0
	Sequential Write(MB/s)	8.2	11.9	13.4	11.9	16.8
SDHC	Capacity	4GB	8GB	16GB	32GB	
	Maximum Performance	Sequential Read (MB/s)	22.2	22.3	22.8	22.4
	Sequential Write(MB/s)	18.3	18.7	17.8	17.6	

Note:

(1). All values quoted are typically at 25°C and nominal supply voltage.

(2). Testing of the Secure Digital Memory Card maximum performance was performed under the following platform:

- Computer with Intel i5 3.5GHz processor
- Windows 7 Professional operating system

## 2.4. System Reliability

**Table 4: System Reliability**

<b>Wear-leveling Algorithms</b>	Global Wear-leveling
<b>Bad Blocks Management</b>	Supported
<b>ECC Technology</b>	24 bits per 512 bytes
<b>Endurance</b>	Un-limited Read Cycles Endurance Management enables ten years minimal useful life
<b>Data Retention</b>	10 years

## 2.5. Physical Specifications

Refer to Table 6 and see Figure 1 for Secure Digital Memory Card THEMIS-A Series physical specifications and dimensions.

**Table 6: Physical Specifications of APRO Secure Digital Memory Card THEMIS-A Series**

<b>Length:</b>	32.00 mm
<b>Width:</b>	24.00 mm
<b>Thickness:</b>	2.10 mm
<b>Weight:</b>	2.5 g / 0.09 oz

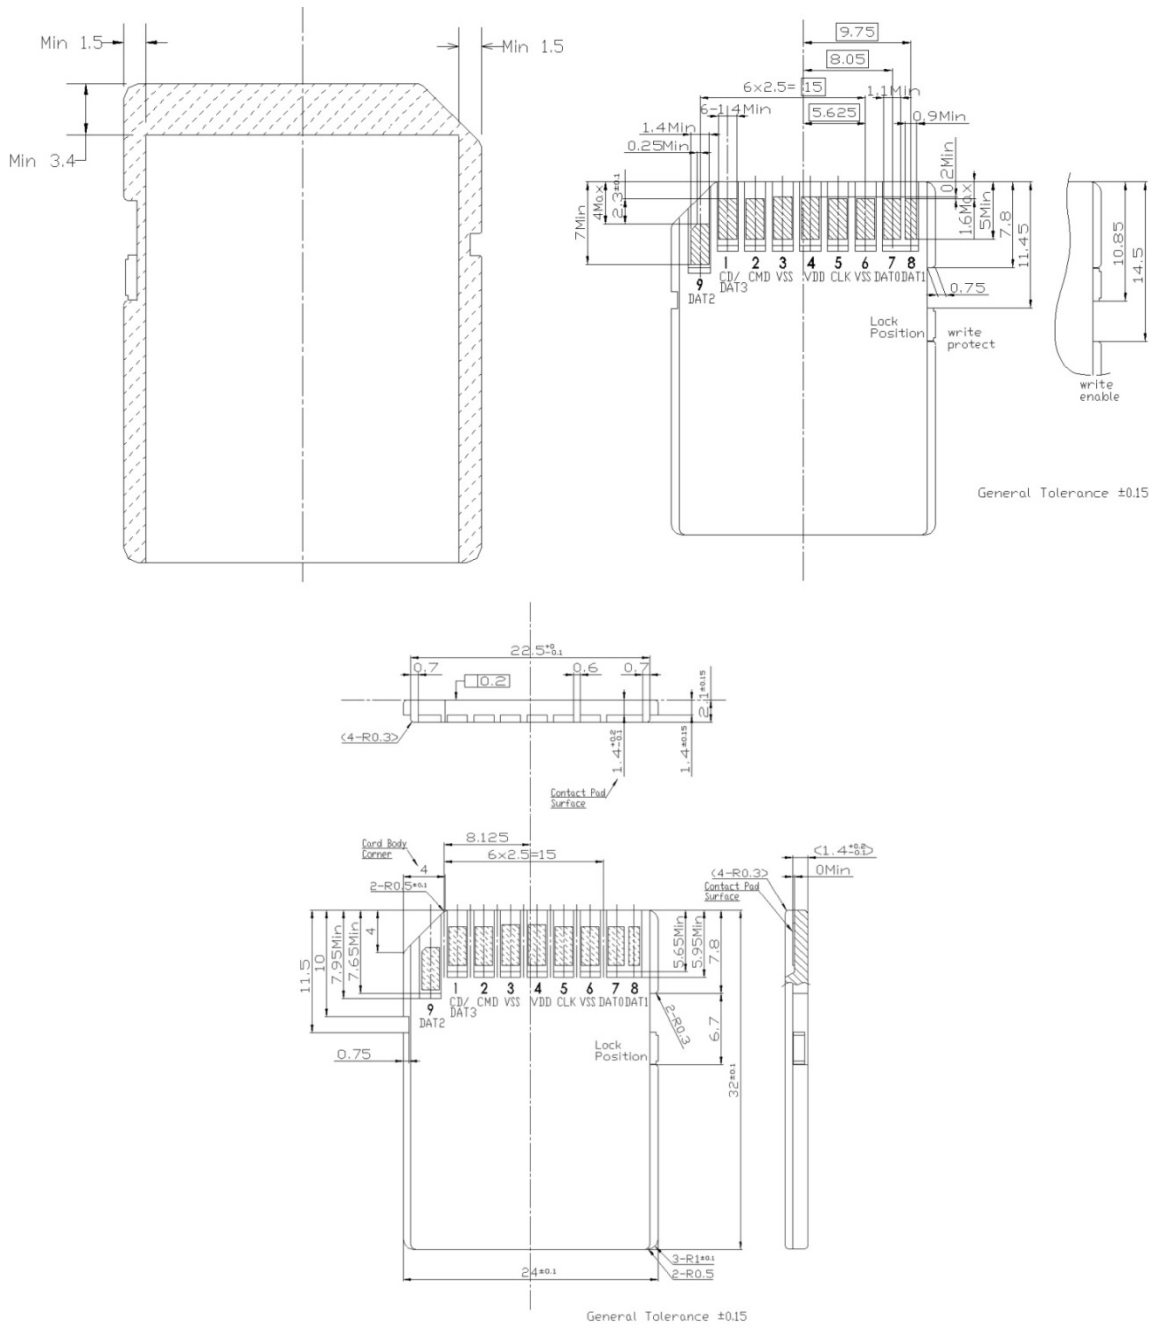
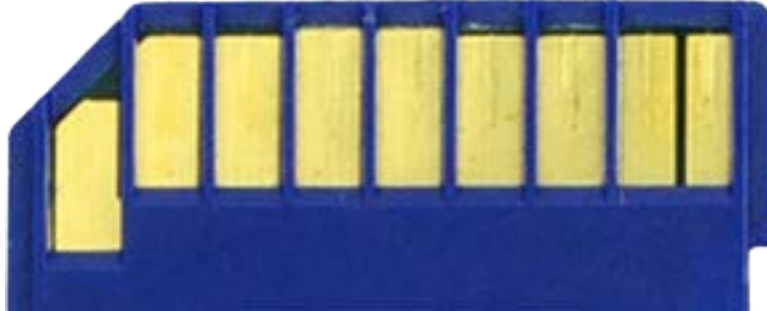


Figure 1: APRO Secure Digital Memory Card Dimension

### 3. Interface Description

#### 3.1. APRO Secure Digital Memory Card interface

APRO Industrial Grade Secure Digital Memory Card has nine exposed contacts on one side.



**Figure 2: 9 Pins Connector**

#### 3.2. Pin Assignments

There are total of 9 pins in the SD Connector. The pin assignments are listed in below table 6.

**Table 7 - Pin Assignments**


Pin #	Operating under SD Mode		
	Pin Name	Type <sup>1</sup>	Function
Pin 1	CD/DAT3 <sup>2</sup>	I/O/PP3	Card Detect/Data Line [Bit 3]
Pin 2	CMD	I/O/PP	Command/Response
Pin 3	V <sub>SS1</sub>	S	Supply voltage ground
Pin 4	V <sub>DD</sub>	S	Supply voltage
Pin 5	CLK	I	Clock
Pin 6	V <sub>SS2</sub>	S	Supply voltage ground
Pin 7	DAT0	I/O/PP	Data Line [Bit 0]
Pin 8	DAT1 <sup>4</sup>	I/O/PP	Data Line [Bit 1]
Pin 9	DAT2 <sup>5</sup>	I/O/PP	Data Line [Bit 2]




**Appendix A: Ordering Information**

**1. Part Number List**

◆ **APRO Secure Digital Memory Card – THEMIS-A Series**

Product Picture	Grade	Industrial Grade ( -40°C ~ +85°C )
	128MB	WPSDC128M-EAITI
	256MB	WPSDC256M-EAITI
	512MB	WPSDC512M-EAITI
	1GB	WPSDC001G-EAITI
	2GB	WPSDC002G-EAITI

Product Picture	Grade	Industrial Grade ( -40°C ~ +85°C )
	4GB	WPSDH004G-EAITI
	8GB	WPSDH008G-EAITI
	16GB	WPSDH016G-EAITI
	32GB	WPSDH032G-EAITI

**2. Part Number Decoder:**

**X1 X2 X3 X4 X5 X6 X7 X8 X9 – X11 X12 X13 X14 X15 – C**

**X1 : Grade**

W: Wide Temp Grade- operating temp. -40° C ~ +85 ° C

**X12 : Controller version**

A, B, C.....

**X2 : The material of case**

P : Plastic casing

**X13 : Controller Grade**

I : Industrial grade

**X3 X4 X5 : Product category**

SDC : Secure Digital (SD) memory card

SDH : Secure Digital High Capacity (SDHC) card

**X14 : Flash IC**

T : Toshiba SLC-NAND Flash IC

**X6 X7 X8 X9 : Capacity**

**128M:** 128MB      **004G:** 4GB

**256M:** 256MB      **008G:** 8GB

**512M:** 512MB      **016G:** 16GB

**001G:** 1GB          **032G:** 32GB

**002G:** 2GB

**X15 : Flash IC grade / Type**

I : Industrial grade

**X11 : Controller**

E : ITE (THEMIS-A Series)

**Appendix B: Limited Warranty**

APRO warrants your Secure Digital Memory Card against defects in material and workmanship for the life of the drive. The warranty is void in the case of misuse, accident, alteration, improper installation, misapplication or the result of unauthorized service or repair. The implied warranties of merchantability and fitness for a particular purpose, and all other warranties, expressed or implied, except as set forth in this warranty, shall not apply to the products delivered. In no event shall APRO be liable for any lost profits, lost savings or other incidental or consequential damages arising out of the use of, or inability to use, this product.

**BEFORE RETURNING PRODUCT, A RETURN MATERIAL AUTHORIZATION (RMA) MUST BE OBTAINED FROM APRO.**

Product shall be returned to APRO with shipping prepaid. If the product fails to conform based on customers' purchasing orders, APRO will reimburse customers for the transportation charges incurred.

**WARRANTY PERIOD:**

- WPSDCxxxx-EAITI

5 years



***The warranty period is able to extend. Please contact APRO and/or Your APRO distributors for more information.***